

LED Intelligent CT Driver (constant voltage)

- Dimming interface: DALI DT8, Push DIM/CCT
- 2 independently SELV constant voltage output channels.
- DALI DT8, DIM and color temperature adjusting driver.
- Constant power design, adjust different color temperature to keep the same brightness.
- Dimming range from 0-100%, LED start at 0.1% possible.
- Color temperature adjusting range: 2500-6000K
- 0~100% flicker-free, High frequency exemption level.
- High Efficient driver: efficiency 93%, PF>0.98, THD<6%.
- In line with the EU energy efficiency ERP directive, standby power consumption < 0.5W
- Innovative thermal management technology, intelligent power life protection.
- Over-heat / Over voltage / Over load / Short circuit protection, recover automatically.
- Fully-protected plastic housing with design of dismountable end cover.
- Suitable for internal lights application for I / II / III
- Up to 50000-hour life time
- 5 years warranty (Rubycon capacitor).


Flicker-free

IEEE 1789

Achieve the exemption level.

Dimmable:

0.1%-100%

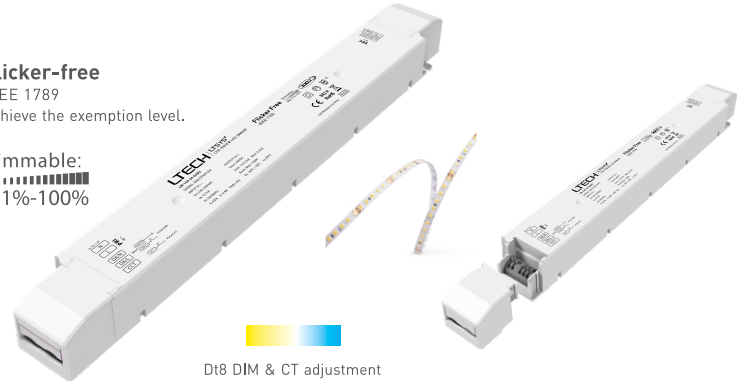

Dt8 DIM & CT adjustment

SELV
RoHS

Class 2



(The certification icon represents undergoing certification applications only, and final certification qualification subject to actual product.)




Specification

Model		LM-150-24-G2D2	LM-150-12-G2D2
OUTPUT	Output Voltage	24Vdc	12Vdc
	Output Voltage Range	24Vdc $\pm$ 0.5Vdc	12Vdc $\pm$ 0.5Vdc
	Output Current	Max. 6.25A	Max. 12.5A
	Output Power	Max. 150W	
	Output Power Range	0~150W	
	Strobe Level	High frequency exemption level.	
	PWM Frequency	3600Hz	
	Dimming Range	0~100%, dimming depth: Max. 0.1%	
	Overload Power Limitation	$\geq$ 102%	
INPUT	Ripple & Noise	Switch ripples $\leq$ 200mV, noises $\leq$ 500mV	Switch ripples $\leq$ 200mV, noises $\leq$ 800mV
	Dimming Interface	DALI DT8(IEC62386), Push DIM/CCT	
	Input Voltage	220-240Vac 200-280Vdc	
	Frequency	50/60Hz	
	Input Current	Max. 0.75A/230Vac	
	Power Factor	PF>0.98/230Vac, at full load	
	THD	<6% at 230Vac, at full load	
	Efficiency (typ.)	93%	92%
	Standby Power Loss	<0.5W	
	Inrush Current(typ.)	Cold start 45A at 230Vac	
	Control surge capability	L-N:2KV	
ENVIRONMENT	Leakage Current	Max. 0.5mA	
	Working Temperature	ta: -20°C ~ 50°C tc: 85°C	
	Working Humidity	20 ~ 95%RH, non-condensing	
	Storage Temp., Humidity	-40°C ~ 80°C, 10~95%RH	
	Temp. Coefficient	$\pm$ 0.03%/°C (0-50°C)	
PROTECTION	Vibration	10~500Hz, 2G 12min./1cycle, period for 72min. each along X, Y, Z axes.	
	Over-heat Protection	Intelligently adjusting or turning off the output current if the PCB temperature $\geq$ 110°C, auto recovers.	
	Over Voltage Protection	Shut down the output when non-load voltage $\geq$ 28V, re-power on to recover after fault condition is removed.	Shut down the output when non-load voltage $\geq$ 16V, re-power on to recover after fault condition is removed.
	Over Load Protection	Shut down the output when current load $\geq$ 102%, auto recovers.	
SAFETY & EMC	Short Circuit Protection	Enter hiccup mode if short circuit occurs, auto recovers.	
	Withstand Voltage	I/P-O/P: 3750Vac	
	Isolation Resistance	I/P-O/P: 100M Ω /500VDC/25°C/70%RH	
	Safety Standards	IEC/EN61347-1, IEC/EN61347-2-13	
	EMC Emission	EN55015, EN61000-3-2 Class C, IEC61000-3-3	
	EMC Immunity	EN61000-4-2,3,4,5,6,8,11 EN61547	
OTHERS	Strobe Test Standard	IEEE 1789	
	Dimension	352×43×30mm(L×W×H)	
	Packing	355×44×33mm(L×W×H)	
	Weight(G.W.)	430g $\pm$ 10g	

* The driver is suitable for connecting resistor current-limiting LED fixture (e.g. LED strip). The inrush current will be dozens of times times increased if connecting built-in constant current IC current-limiting LED fixtures, the driver will activate the overloaded protection (hiccup flickering). When you order, please remark controlling the constant current LED fixture (e.g. MR16 lamp, underground light, LED wall washer, constant current LED strip, etc.), then we can prepare the special programs.


Dimensions

Unit: mm

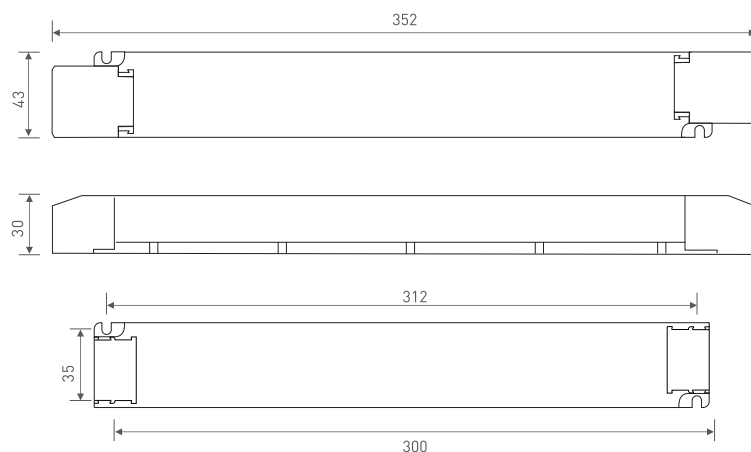


Wiring Diagram

DALI DT8 Connection

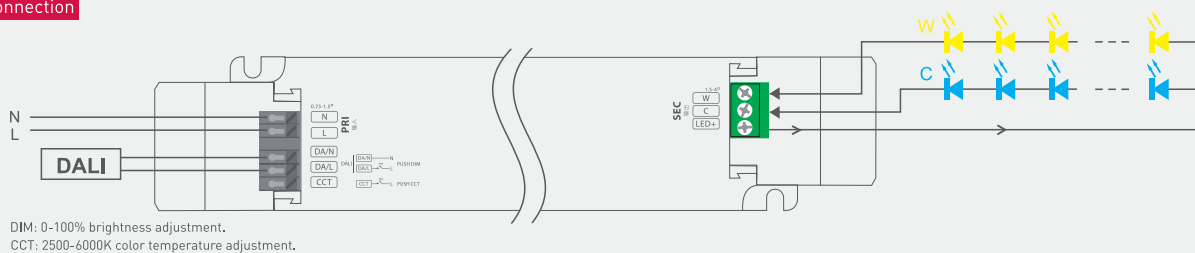

Push DIM/CCT Connection

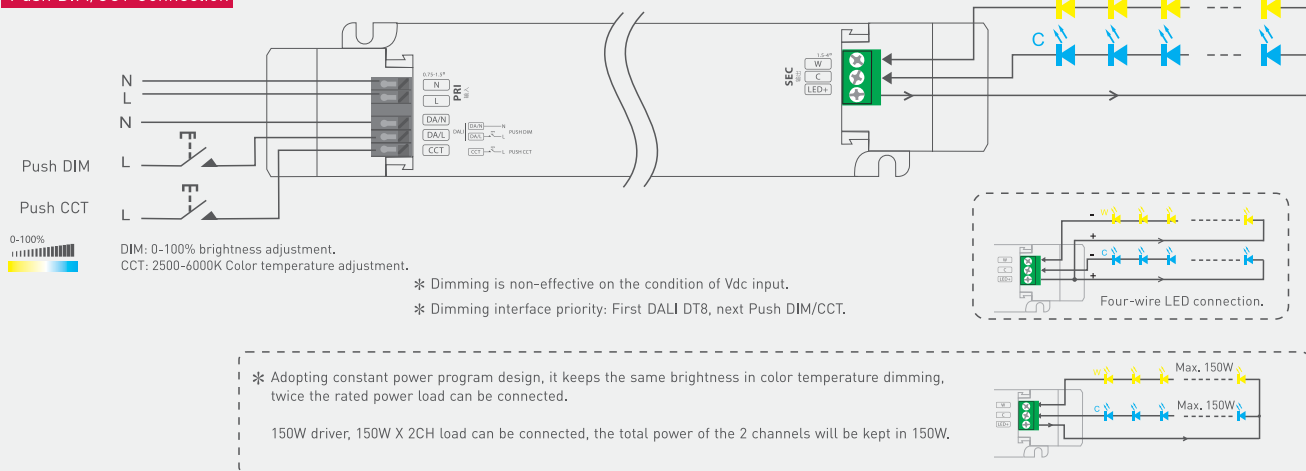

Push Dimming




Reset switch


- On/off control: Short press.
- Stepless dimming and color adjustment: long press
- With every other long press, the brightness and color temperature go to the opposite direction.
- Dimming memory: Brightness will be the same as previously adjusted when turning on again.

Application of Protective Cover

Wire pressing board:




Push the wire pressing board to fix the wire.







Push outward the side plate, meanwhile use the tool to uninstall the wire pressing board.

Uninstall protective cover:




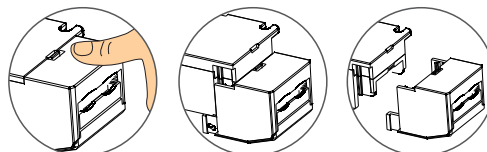


Break off the bottom left and right to remove the protective cover.

Relationship Diagrams

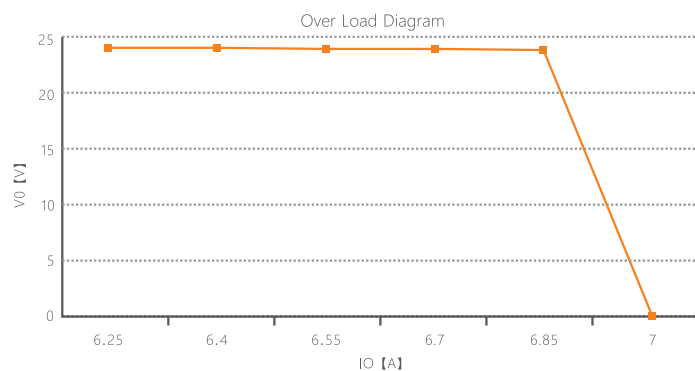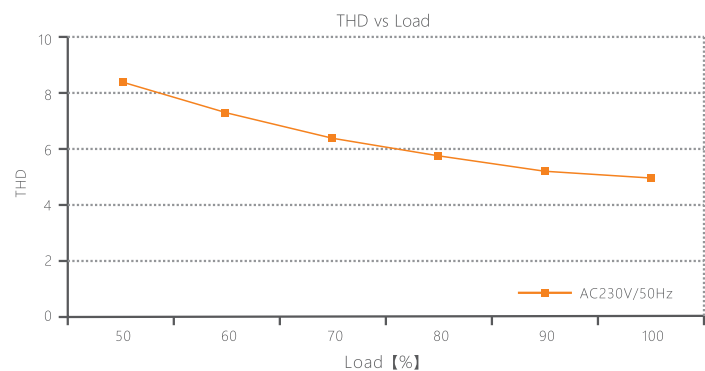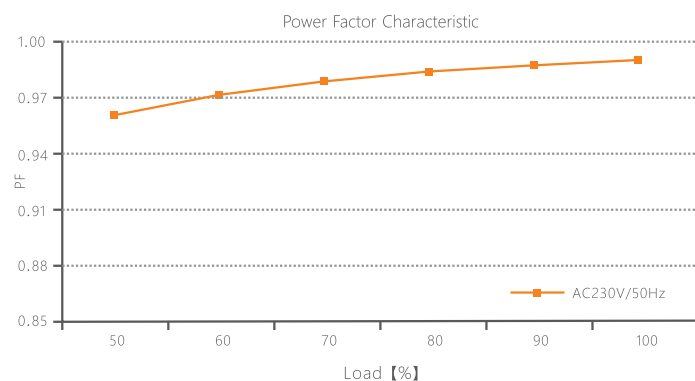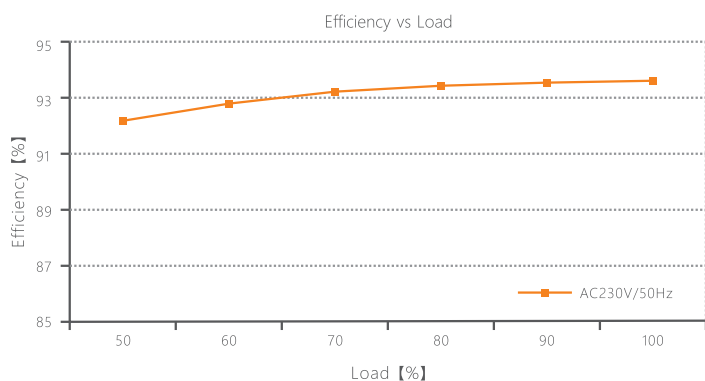


LM-150-24-G2D2

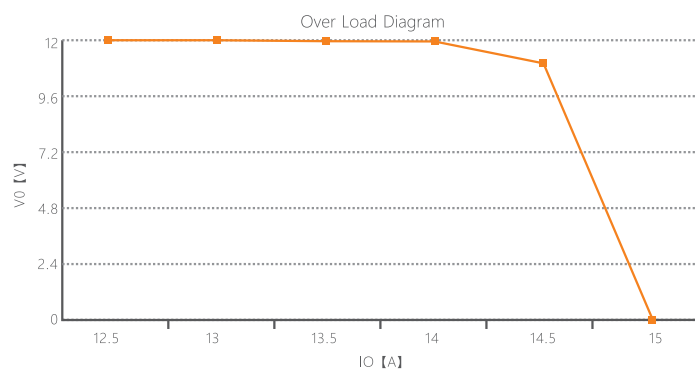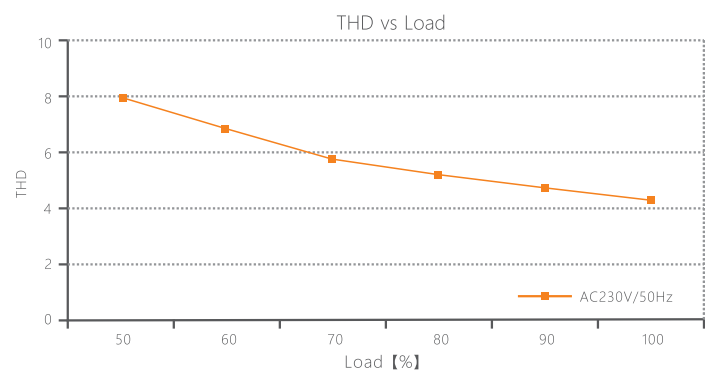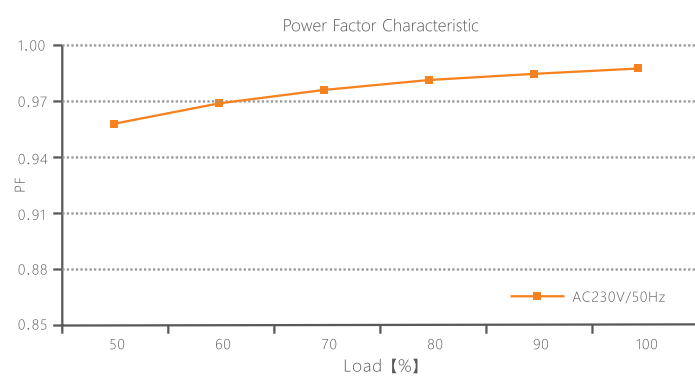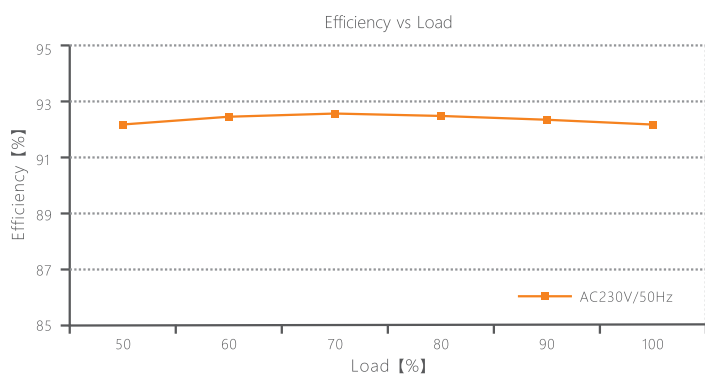

LM-150-12-G2D2

Flicker Test Form

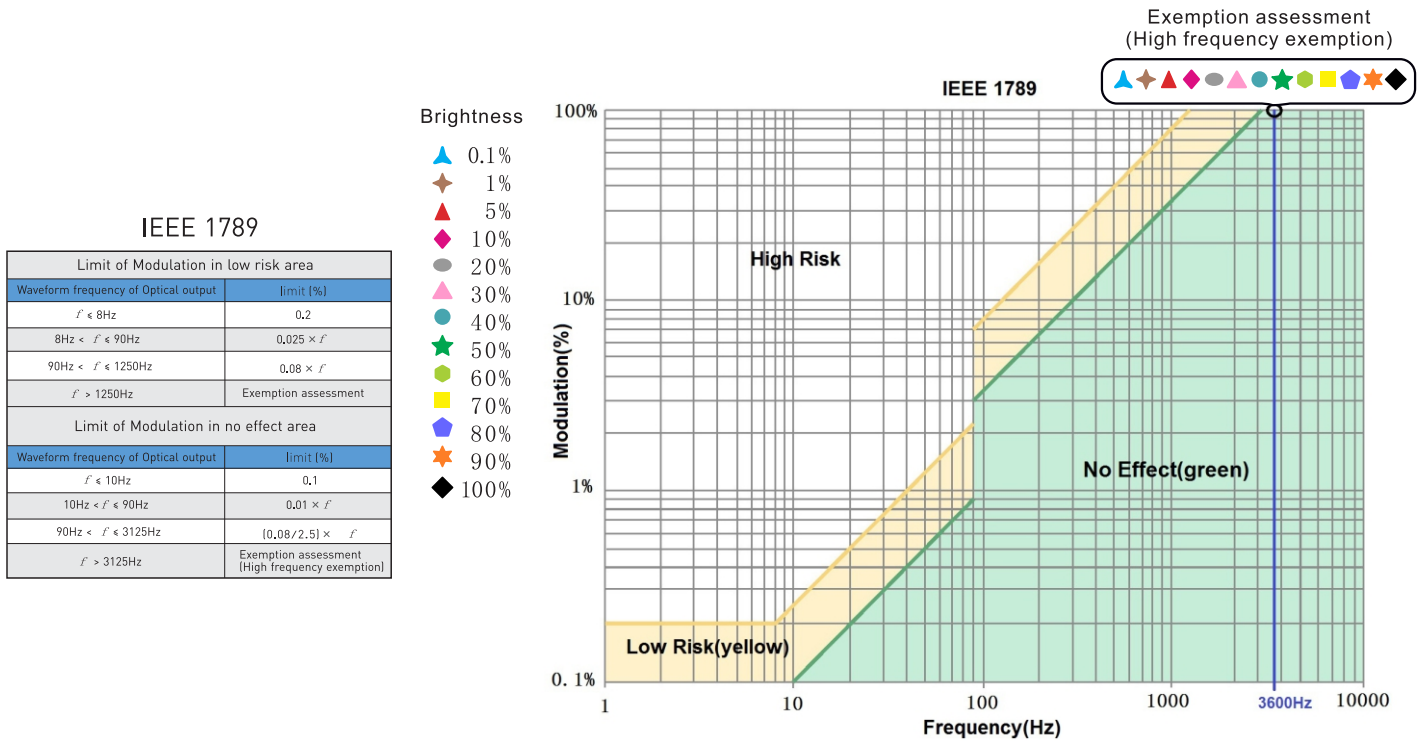

* No further notice if any changes in the manual. Product function depends on the goods. Please feel free to contact your supplier if any question.

Available from:



Sales & Technical Support:

Bright Green Connect Limited
Unit 3, Oyster Park
Byfleet
Surrey
KT14 7AX

📞 +44 (0) 1932 497992

✉ contact@brightgreenconnect.com

🖱 brightgreenconnect.com