

Intelligent LED Driver (Constant Current)


- Small size and light weight. The housing is made from V0 flame retardant PC materials from SAMSUNG/COVESTRO.
- Support Leading edge (Triac), Trailing edge (ELV) .
- With soft-on and fade-in dimming function, enhancing your visual comfort.
- T-PWM dimming technology allows continuous and flicker-free images under high-speed photography.
- The whole dimming process is flicker-free with high frequency exemption level.
- Dimming from 0~100%, down to 0.1%.
- Overheat, over voltage , overload, short circuit protection and automatic recovery.
- Normal service life can reach 100,000 hours.
- 5-year warranty (Rubycon capacitor).

0~100% dimming

T-PWM
Dimming Technology

Flicker Free
IEEE 1789

Dimmable:
1:1000

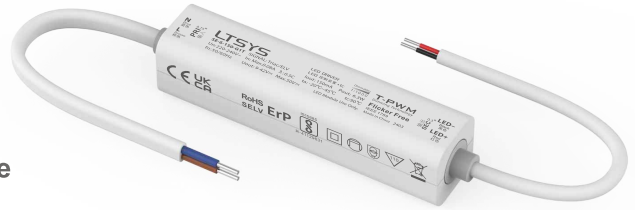

The certification icon represents undergoing certification applications only, and final certification qualification subject to actual product.

Technical Specs


Model		SE-6-100-G1T		SE-6-150-G1T		SE-6-200-G1T		SE-6-250-G1T		SE-6-300-G1T		SE-6-350-G1T		SE-6-400-G1T	
Features	Output Type	Constant current													
	Dimming Interface	Triac/ELV													
	Output Feature	Isolation													
	Protection Grade	IP20													
	Insulation Grade	Class II (Suitable for class I/ II /III light fixtures)													
OUTPUT	Output Voltage	9-42Vdc		9-42Vdc		9-31.5Vdc		9-25Vdc		9-21Vdc		9-18Vdc		9-15.5Vdc	
	Maximum output voltage	≤50Vdc		≤50Vdc		≤50Vdc		≤50Vdc		≤50Vdc		≤30Vdc		≤30Vdc	
	Output Current	100mA		150mA		200mA		250mA		300mA		350mA		400mA	
	Output Power	Max.4.2W		Max.6.3W		Max.6.3W		Max.6.25W		Max.6.3W		Max.6.3W		Max.6.2W	
	Load Power Range	0.9-4.2W		1.35-6.3W		1.8-6.3W		2.25-6.25W		2.7-6.3W		3.15-6.3W		3.6-6.2W	
	Dimming Range	0~100%, down to 0.1%													
	LF Current Ripple	<3%													
	Current Accuracy	±5%													
PWM Frequency	3600Hz														
INPUT	DC Voltage Range	200-280Vdc(Dimming is not possible)													
	AC Voltage Range	220-240Vac													
	Input Voltage	230Vac													
	Frequency	50/60Hz													
	Input Current	≤0.08A/230Vac													
	Power Factor	PF<0.5/230Vac(at full load)													
	Efficiency [Typ.]	>70%		>72%											
	Inrush Current	Cold start 15A[Test twidth=300us tested under 50% Ipeak]/230Vac													
	Anti Surge	L-N:1KV													
Leakage Current	<0.5mA/230Vac														
ENVIRONMENT	Working Temperature	ta:-20°C~45°Ctc:90°C													
	Working Humidity	20 ~ 95%RH, non-condensing													
	Storage Temperature/Humidity	-40~80°C/10~95%RH													
	Temperature Coefficient	±0.03%/°C[-20°C~45°C]													
	Vibration	10-500Hz, 2G 12min/1cycle, 72 min for X, Y and Z axes respectively													
PROTECTION	Overload Protection	Automatically protect the device when the load exceeds 102%-135% of the rated power. Automatically recover once load is reduced													
	Overheat Protection	Intelligently adjust or turn off the current output if the PCB temperature ≥110°C. When the PCB temperature <90°C, automatically recover normal output													
	Short Circuit Protection	Enter hiccup mode if short circuit occurs, and recover automatically													
SAFETY & EMC	Withstand Voltage	I/P-O/P: 3750Vac													
	Insulation Resistance	I/P-O/P: 100MΩ/500VDC/25°C/70%RH													
	Safety Standards	CE	European Union		EN61347-1, EN61347-2-13, EN62384										
		UKCA	Britain		BS EN 61347-1, BS EN 61347-2-13, BS EN 62493										
		BIS	India		IS 15885 [PART 2/SEC 13]										
	EMC Emission	CE	European Union		EN55015, EN61000-3-2, EN61000-3-3, EN61547										
	EMC Immunity	EN61000-4-2,3,4,5,6,8,11, EN61547													
ErP	Power Consumption	Standby power consumption			Network standby power consumption (when the thyristor signal is 0, the power consumption is 0)										
		No-load power consumption			No-no load mode										
	Flicker/Stroboscopic Effect	IEEE1789			Meet IEEE 1789 standard/High frequency exemption level										
		CIE SVM			Pst LM≤1.0, SVM≤0.4										
Others	Weight[N.W.]	50g±5g													
	Dimensions	84x20x20mm(LxWxH)													

Technical Specs

Model		SE-6-450-G1T		SE-6-500-G1T		SE-6-550-G1T		SE-6-600-G1T		SE-6-650-G1T		SE-6-700-G1T							
Features	Output Type	Constant current																	
	Dimming Interface	Triac/ELV																	
	Output Feature	Isolation																	
	Protection Grade	IP20																	
	Insulation Grade	Class II (Suitable for class I/ II /III light fixtures)																	
OUTPUT	Output Voltage	9-14Vdc			2-12.5Vdc			2-11.5Vdc			2-10.5Vdc			2-9.5Vdc			2-9Vdc		
	Maximum output voltage	≤30Vdc			≤30Vdc			≤30Vdc			≤30Vdc			≤30Vdc			≤30Vdc		
	Output Current	450mA			500mA			550mA			600mA			650mA			700mA		
	Output Power	Max.6.3W			Max.6.25W			Max.6.3W			Max.6.3W			Max.6.175W			Max.6.3W		
	Load Power Range	4.05-6.3W			1-6.25W			1.1-6.3W			1.2-6.3W			1.3-6.175W			1.4-6.3W		
	Dimming Range	0~100%, down to 0.1%																	
	LF Current Ripple	<3%																	
	Current Accuracy	±5%																	
PWM Frequency	3600Hz																		
INPUT	DC Voltage Range	200-280Vdc(Dimming is not possible)																	
	AC Voltage Range	220-240Vac																	
	Input Voltage	230Vac																	
	Frequency	50/60Hz																	
	Input Current	≤0.08A/230Vac																	
	Power Factor	PF<0.5/230Vac(at full load)																	
	Efficiency (Typ.)	>72%																	
	Inrush Current	Cold start 15A[Test twidth=300us tested under 50% Ipeak]/230Vac																	
	Anti Surge	L-N:1KV																	
Leakage Current	<0.5mA/230Vac																		
ENVIRONMENT	Working Temperature	ta:-20°C~45°Ctc:90°C																	
	Working Humidity	20 ~ 95%RH, non-condensing																	
	Storage Temperature/Humidity	-40~80°C/10~95%RH																	
	Temperature Coefficient	±0.03%/°C[-20°C~45°C]																	
	Vibration	10~500Hz, 2G 12min/1cycle, 72 min for X, Y and Z axes respectively																	
PROTECTION	Overload Protection	Automatically protect the device when the load exceeds 102%-135% of the rated power. Automatically recover once load is reduced																	
	Overheat Protection	Intelligently adjust or turn off the current output if the PCB temperature ≥110°C. When the PCB temperature <90°C, automatically recover normal output																	
	Short Circuit Protection	Enter hiccup mode if short circuit occurs, and recover automatically																	
SAFETY & EMC	Withstand Voltage	I/P-O/P: 3750Vac																	
	Insulation Resistance	I/P-O/P: 100MQ/500VDC/25°C/70%RH																	
	Safety Standards	CE	European Union		EN61347-1, EN61347-2-13, EN62384														
		UKCA	Britain		BS EN 61347-1, BS EN 61347-2-13, BS EN 62493														
		BIS	India		IS 15885 (PART 2/SEC 13)														
	EMC Emission	CE	European Union		EN55015, EN61000-3-2, EN61000-3-3, EN61547														
	EMC Immunity	EN61000-4-2,3,4,5,6,8,11, EN61547																	
ErP	Power Consumption	Standby power consumption			Network standby power consumption (when the thyristor signal is 0, the power consumption is 0)														
		No-load power consumption			No-no load mode														
	Flicker/Stroboscopic Effect	IEEE1789			Meet IEEE 1789 standard/High frequency exemption level														
		CIE SVM			Pst LM≤1.0, SVM≤0.4														
Others	Weight[N.W.]	50g±5g																	
	Dimensions	84x20x20mm(LxWxH)																	


Product Size

Unit: mm

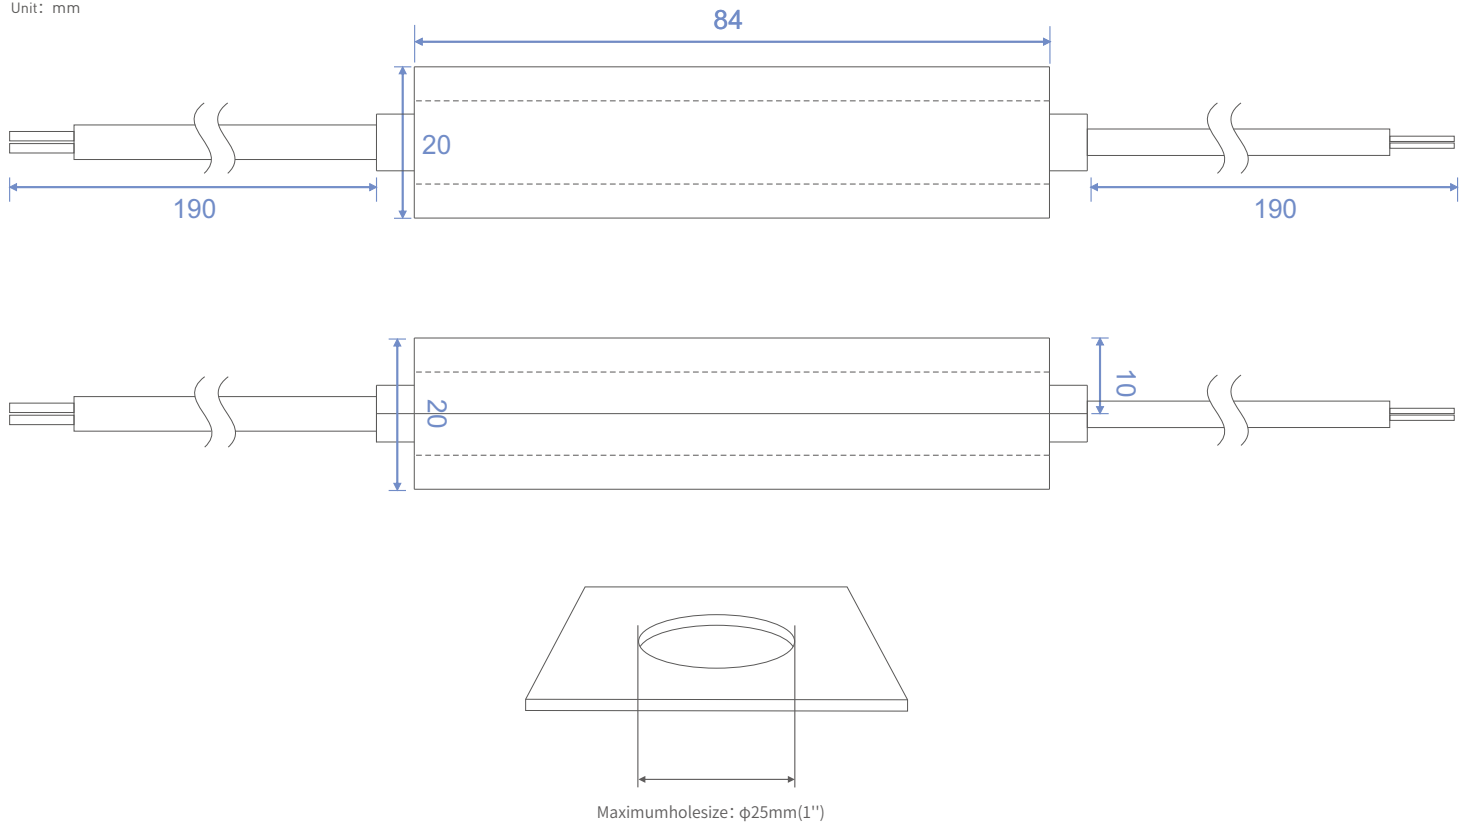

Wiring Diagram


Triac Connection

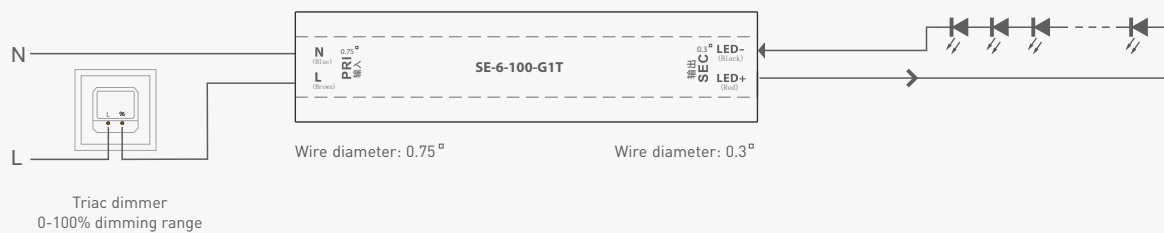

ELV Connection





Installation Precautions





Please do not stack the products. The distance between two products should be $\geq 15\text{cm}$ so as not to affect heat dissipation and the lifespan of the products.


Note: The installation should be in line with the environmental operating temperature of the product. Do not install it inside the lamp to avoid exceeding the environmental operating temperature of the product, which may affect the product's lifespan.



Please not place the products on LED drivers. The distance between the product and the driver should be $\geq 15\text{cm}$ so as not to affect heat dissipation and shorten the lifespan of the products.




Do not fix the product screws tightly against the wooden board. Instead, add a washer with a thickness of $\geq 7\text{mm}$ under the fixing screws. Leaving some gaps can effectively dissipate heat, preventing any impact on the product's heat dissipation performance and service life.




Relationship Diagrams

Efficiency VS Load

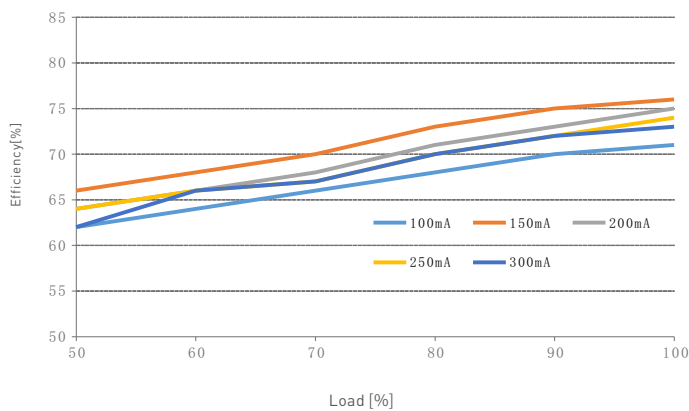

Efficiency VS Load

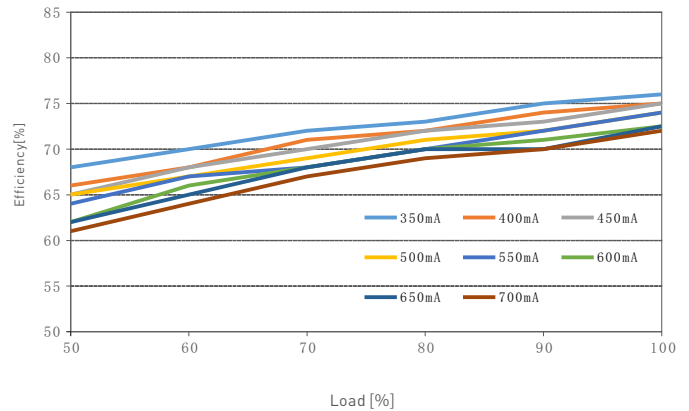


Flicker Test Sheet

IEEE 1789

Limit of modulation in low risk area	
Waveform frequency of optical output	limit[%]
$f \leq 8\text{Hz}$	0.2
$8\text{Hz} < f \leq 90\text{Hz}$	$0.025 \times f$
$90\text{Hz} < f \leq 1250\text{Hz}$	$0.08 \times f$
$f > 1250\text{Hz}$	Exemption assessment
Limit of modulation in no effect area	
Waveform frequency of optical output	limit[%]
$f \leq 10\text{Hz}$	0.1
$10\text{Hz} < f \leq 90\text{Hz}$	$0.01 \times f$
$90\text{Hz} < f \leq 3125\text{Hz}$	$[0.08/2.5] \times f$
$f > 3125\text{Hz}$	Exemption assessment (High frequency exemption)

Brightness

- ▲ 0.1%
- ▲ 1%
- ▲ 5%
- ▲ 10%
- 20%
- ▲ 30%
- 40%
- ★ 50%
- 60%
- 70%
- 80%
- ★ 90%
- ◆ 100%

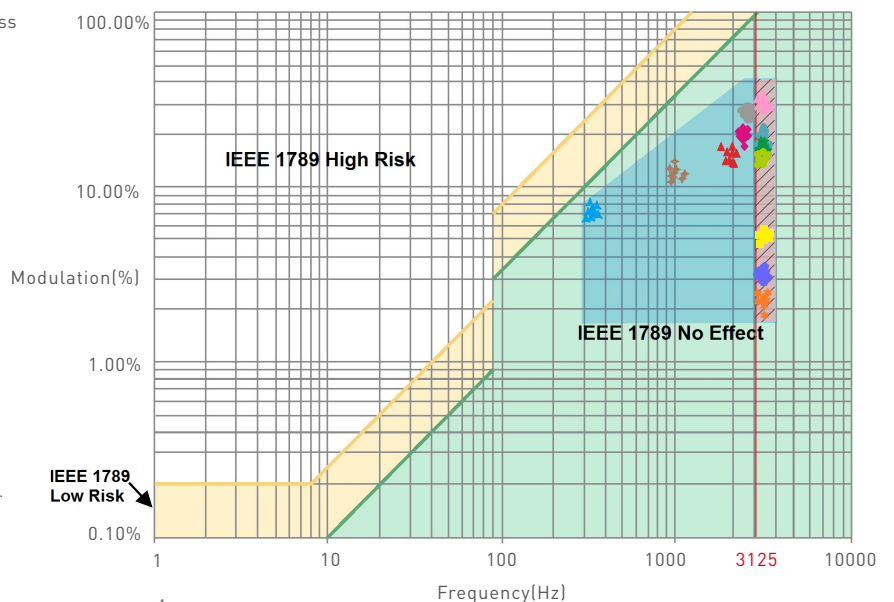


Marks in the right chart were tested results of different current ranges.

The output frequency is 0Hz in 100% brightness and its corresponding modulation is 0%, which could not be shown in the right chart.

Packaging Specifications

Model	SE-6-100-G1T/SE-6-150-G1T/SE-6-200-G1T/SE-6-250-G1T/ SE-6-300-G1T/SE-6-350-G1T/SE-6-400-G1T/SE-6-450-G1T/ SE-6-500-G1T/SE-6-550-G1T/SE-6-600-G1T/SE-6-650-G1T/ SE-6-700-G1T
Carton Dimensions	318×240×215mm(L×W×H)
Quantity	22 PCS/Layer; 5 Layers/Carton; 110 PCS/Carton
Weight	0.055kg/PCS; 6.0 kg±5%/Carto

Packaging Image

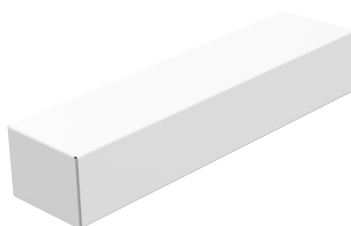

Inner Packaging Box



Carton Packaging

Transportation and Storage

1. Transportation

Products can be shipped via vehicles, boats and planes.

During transportation, products should be protected from rain and sun. Please avoid severe shock and vibration during the loading and unloading process.

2. Storage

The storage conditions should comply with the Class I Environmental Standards. The products that have been stored for more than six months are recommended to be re-inspected and can be used only after they have been qualified.

Attentions

- This product must be installed and adjusted by a qualified professional.
- This product is non-waterproof (special models excepted). Please avoid the sun and rain. When installed outdoors, please ensure it is mounted in a water proof enclosure.
- Good heat dissipation will extend the life the product. Please install the product in a environment with good ventilation.
- When you install this product, please avoid being near a large area of metal objects or stacking them to prevent signal interference.
- Please keep the product away from a intense magnetic field, a high pressure area or a place where lightning is easy to occur.
- Please check whether the working voltage used complies with the parameter requirements of the product.
- Before you power on the product, please make sure all the wiring is correct in case of incorrect connection that may cause a short circuit and damage the components, or trigger a accident.
- If a fault occurs, please do not attempt to fix the product by yourself. If you have any question, please contact the supplier.

* This manual is subject to changes without further notice. Product functions depend on the goods. Please feel free to contact our company or our official distributors if you have any question.

Warranty Agreement

- Warranty periods from the date of delivery: 5 years.
- Free repair or replacement services for quality problems are provided within warranty periods.

Warranty exclusions below:

- Beyond warranty periods.
- Any artificial damage caused by high voltage, overload, or improper operations.
- Products with severe physical damage.
- Damage caused by natural disasters and force majeure.
- Warranty labels and barcodes have been damaged.
- No any contract signed by LTECH.

1. Repair or replacement provided is the only remedy for customers. LTECH is not liable for any incidental or consequential damage unless it is within the law.
2. LTECH has the right to amend or adjust the terms of this warranty, and release in written form shall prevail.