

Constant Voltage LED Power Supply

SLT100-12VL-E

SLT100-24VL-E



Product description:

This type of power supply is an exclusively designed stabilized power supply for LED lamp. With constant voltage (CV) , it is suitable for constant voltage lamps (12/24V DC) connected in parallel lamps .

The built-in protection circuit will shut down the power supply in case of such faults as: open circuit, short circuit, over load and over temperature protection. The power supply will restart automatically after fault correction.



Standards:

EN61347-1
EN61347-2-13
EN61547
EN55015
EN61000-3-2
EN61000-3-3
EN62384
EN62493


Characteristics:

- Independent power supply for constant voltage LED lamp
- Terminal block for quick connection
- Class II protection against electric shock from direct and indirect contact
- SELV output(<60V)
- Fast start-up time <0.5s
- Open circuit, short circuit, over load and over temperature protection
- Auto restart after removal of fault conditions
- Efficiency:88.5% (AC230V , full load)


Specifications:

Model	SLT100-12VL-E		SLT100-24VL-E	
Output	turn on time(S)	<0.5	<0.5	
	output power(W)	100	100	
	output votage(V)	12	24	
	output voltage tolerance ^①	+/-5%	+/-5%	
	ripple voltage(mV)	800(Vp-p)	800(Vp-p)	
	working current range(A)	0-8.33	0-4.17	
	dimming interface	No		
	dimming range	n/a		
Input	rated supply voltage(Vac)	220-240	220-240	
	voltage range(Vac)	198-264	198-264	
	line frequency(Hz)	50/60	50/60	
	input current(mA)	600	600	
	efficiency ^②	88.5%	91.7%	
	average efficiency ^③	87.0%	86.5%	
	no load power consumption(W)	<0.5	<0.5	
	power factor ^②	0.95	0.95	
	inrush current(Ipk)	50A/360us	50A/180us	
Protection	over voltage protection	YES	YES	
	short circuit protection	YES	YES	
	over temperature protection	YES	YES	
	automatic restart	YES	YES	
	over load protection	YES	YES	
	surge capacity	L-N: 2kV	L-N: 2kV	
Ambient and Life	Ta(℃)	-20....40	-20....40	
	Tc max.(℃)	80	80	
	Storage Temperature(℃)	-30...80		
	ambient humidity range	5%...85%, Not condensing		
	nominal life-time(hrs)	40000@TC=80℃	50'000@Tc=80℃	
Other	weight(g)	316		
	dimensions (L×W×H)(mm)	185×60×31		
	casing material	Plastic		
	housing colour	White+Blue		
	type of protection	IP20		
	protection class	ClassII		
Note	1. Tolerance:includes set up tolerance, line regulation and load regulation. 2. Tested at full load,230Vac.Refer to""Power Factor"" and ""EFFICIENT""curve graphs. 3. Calculate the model's average efficiency for each test voltage by testing at 100%, 75%, 50%, and 25% of rated current and then computing the simple arithmetic erage of these four values. 4. All parameters NOT specially mentioned are measured at nominal voltage input, rated load and 25 of ambient temperature. 5. The power supply is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.			



Dimensions(mm):

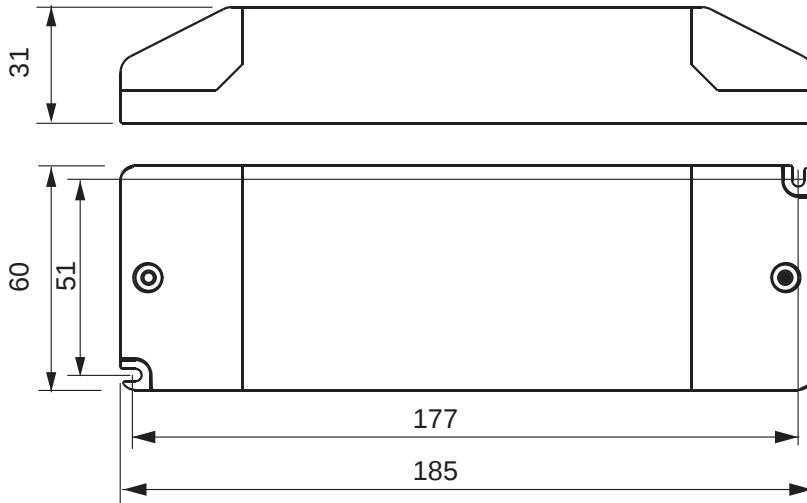

Wiring diagram:

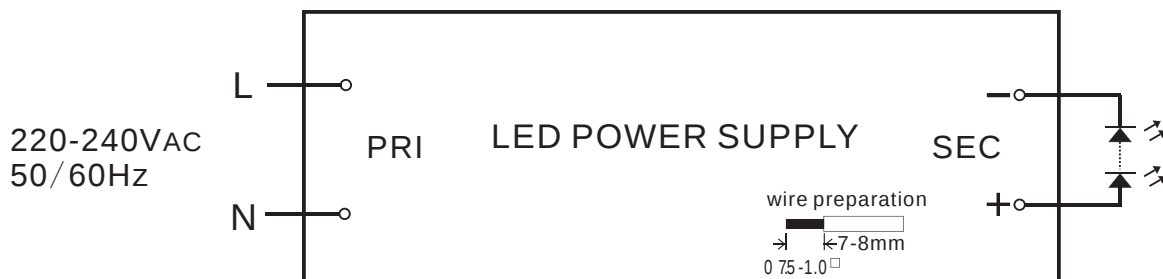

Electrical curves:

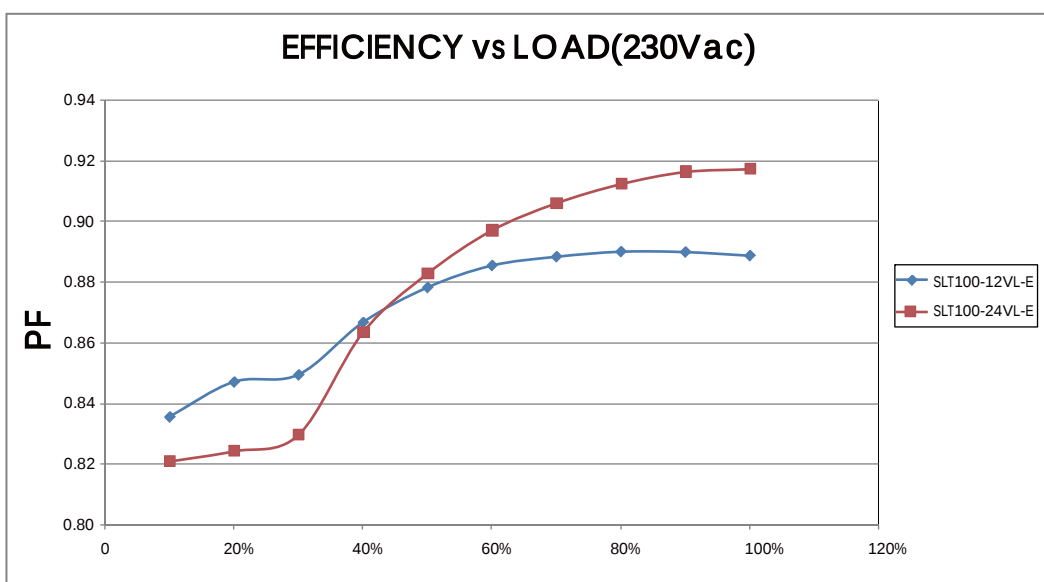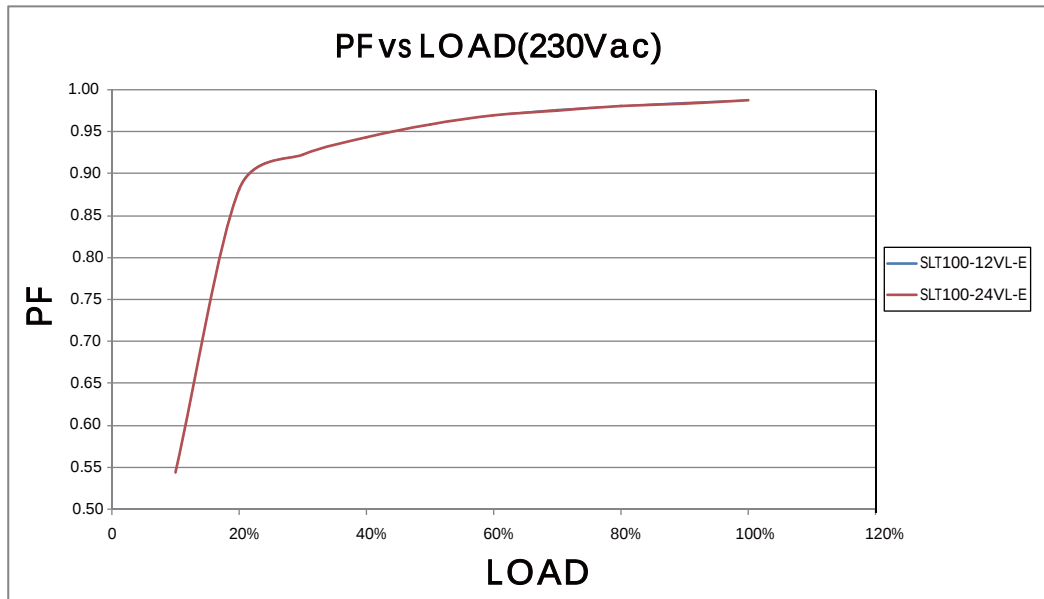

note

For constant current power supply,"LOAD" means the percentage of the maximum rated output voltage.
For constant voltage power supply,"LOAD" means the percentage of the maximum rated output current.

Sales & Technical Support:

Bright Green Connect Limited

Unit 3, Oyster Park
Byfleet
Surrey
KT14 7AX

☎ +44 (0) 1932 497992

✉ contact@brightgreenconnect.com

🌐 brightgreenconnect.com

*Due to continuous improvements and innovations, specifications are subjected to change without notice.