

Constant Current LED Power Supply

SLT25-600IL-E(for independent use)

SLT25-600IB-E(for built-in use)



Product description :

It is designed for built in or independent application with compact size. The out put current can change from 250mA to 600mA by dipswitch with 50mA per step. It meets SELV standard of preventing electric shock. Open circuit, short circuit, over load and over temperature Protection enhance the safety in processing.


 optional)




SELV

 pending

Standards:

EN61347-1
EN61347-2-13
EN61547
EN55015
EN61000-3-2
EN61000-3-3
EN62384
EN62493


Characteristics:

- Multipower driver supplied with dip-switch for the selection of the output current.
- Class II protection against electric shock for direct or indirect contact
- Driver for built-in or independent use.
- It can be used for lighting equipment in protection class I and II
- Active Power Factor Corrector.
- Ripple free in all selectable output current
- Open circuit, short circuit, over load and over temperature protection
- Auto restart after fault conditions removal
- Warranty: 5 years


Specifications:

Model		SLT25-600IB-E(for build-in use)	SLT25-600IL-E(for independent use)
Output	turn on time(S) ^①	≤0.5	
	output current(mA) ^①	250/300/350/400/450/500/550/600	
	output current tolerance ^②	+/-7%	
	ripple current(%) ^③	3	
	working voltage range(V)	27-42	
	output power range(W)	6.75-25.2	
	Max. output voltage(V)	50	
	output safety rating	SELV	
	dimming interface	no	
	dimming range	n/a	
Input	rated supply voltage(Vac)	220-240	
	voltage range(Vac)	198-264	
	line frequency(Hz)	50/60	
	input current(mA)	150	
	input power(W) ^①	29	
	efficiency ^①	87%	
	power factor ^①	0.95	
	THD ^①	13%	
	inrush current(lpk) ^①	8.5A/10uS	
Protection	input over voltage protection	-	
	short circuit protection	yes	
	over temperature protection	yes	
	automatic restart	yes	
	over load protection	yes	
	surge capacity	L-N:1KV	
Ambient and Life	Ta(℃)	-20...+50	
	Tc max. (℃)	80	
	nominal life-time(hrs)	50000h@Tc	
	guarantee(years)	5	
	Storage Temperature(℃)	-30...80	
	ambient humidity range	5%...85%RH, Not condensing	
Other	weight(g)	80	
	dimensions (LxWxH)(mm)	66.7x41x22/85.3x41x22	
	casing material	Plastic	
	housing colour	Grey+Blue	
	connecting method	Terminal block	
	type of protection	IP20	
	protection class	Built-in/Class II	
Note	1. At 230Vac,50Hz,full load. 2. Tolerance:includes set up tolerance,line regulation and load regulation. 3. At 230Vac,50Hz,LED load,below 200Hz		

Dimensions(mm):

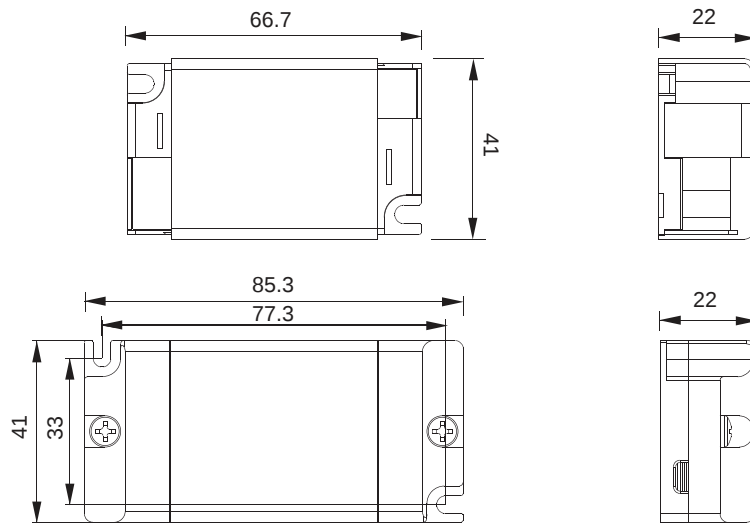

Wiring diagram:

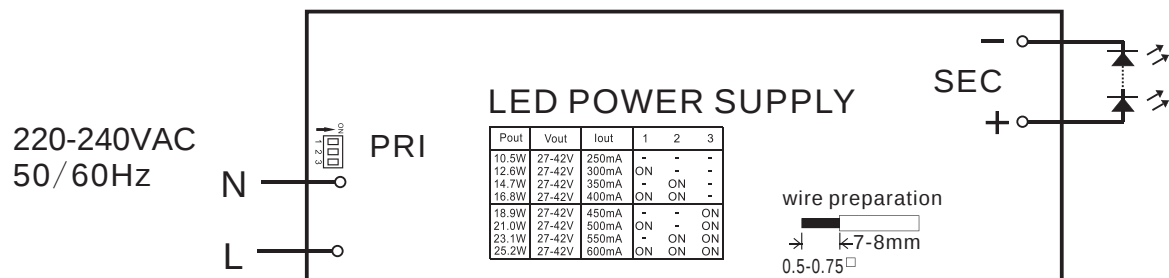


Application:



Built-in application



Independent application

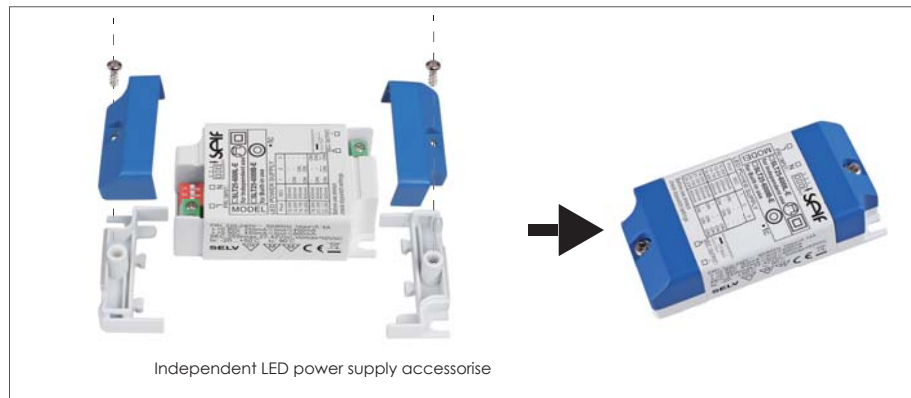

Electrical curves:

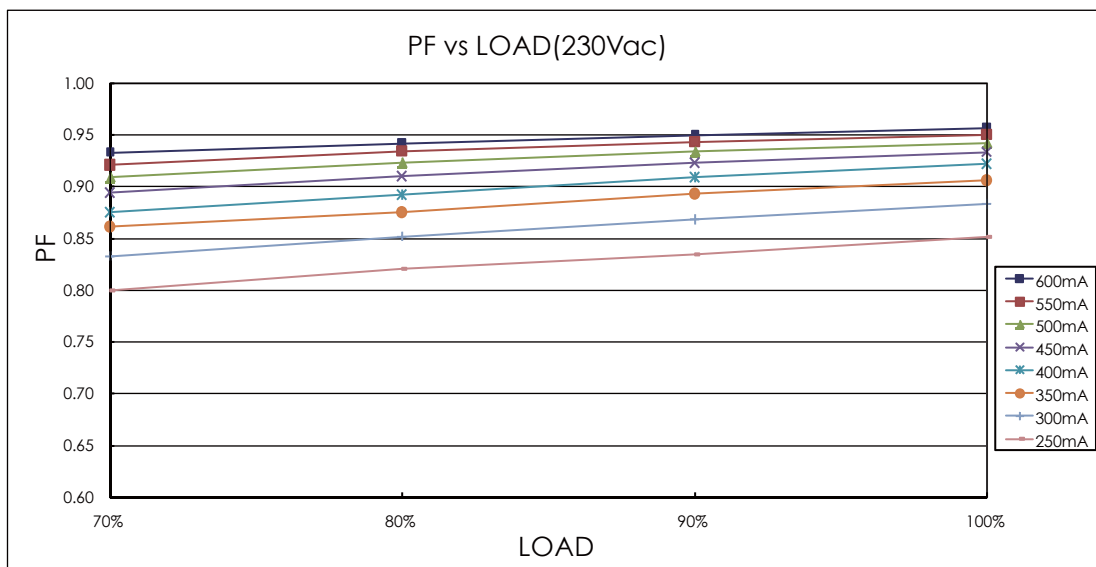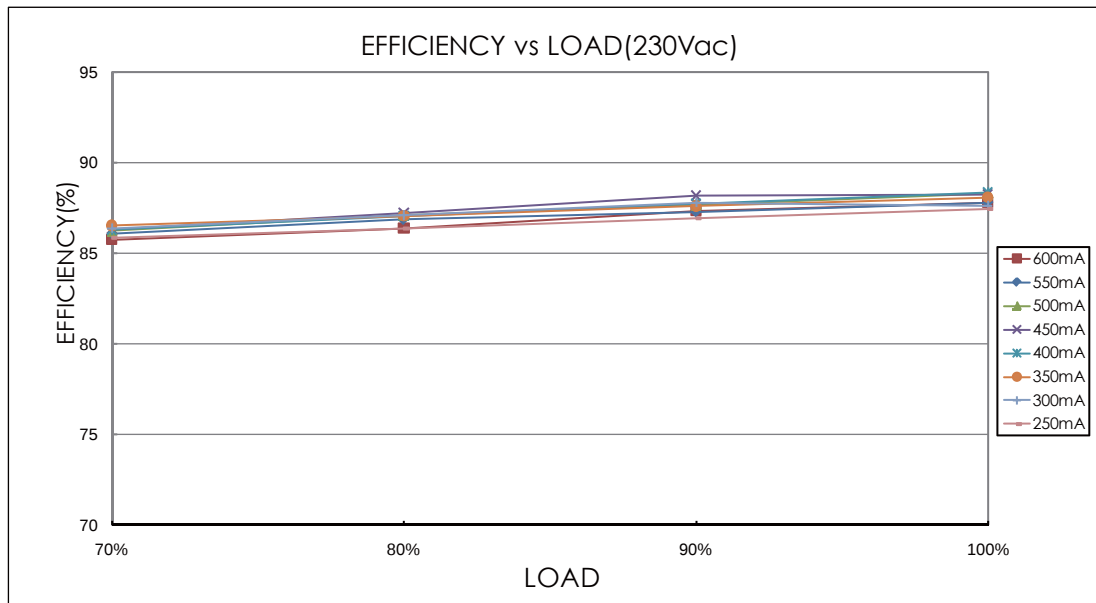

note

For constant current power supply,"LOAD" means the percentage of the maximum rated output voltage.
For constant voltage power supply,"LOAD" means the percentage of the maximum rated output current.

Sales & Technical Support:

Bright Green Connect Limited

Unit 3, Oyster Park
Byfleet
Surrey
KT14 7AX

☎ +44 (0) 1932 497992

✉ contact@brightgreenconnect.com

🌐 brightgreenconnect.com

*Due to continuous improvements and innovations, specifications are subjected to change without notice.