
Ultrathin Series
Fix
SLT150-24/48VFE-EU



Dimensions: (mm)

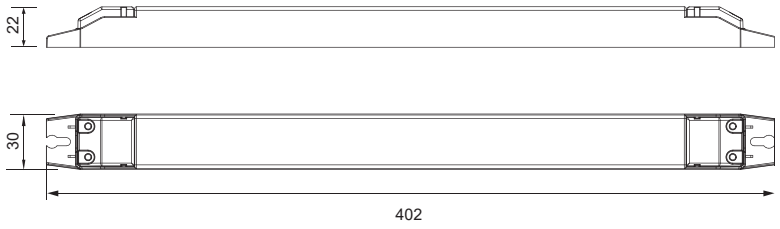

SELV CE EL

optional optional (only for 48V version)

- Independent power supply for constant voltage LED lamp
- Class II protection against electric shock from direct and indirect contact
- Start-up time ≤0.5s
- No load power consumption≤0.5W
- Open circuit，short circuit，over load and over temperature protection
- Auto restart after removal of fault conditions
- Reinforced EMC function suitable for both Class I and Class II luminaire
- Designed with G2.5 protection function
- Warranty : 5 Years

Specifications

Model	Rated input	PF	Output	Output Power range	Output voltage range	Tolerance	Efficiency	ta	tc	Size	Approval
SLT150-24VFE-EU	AC220-240V	0.95	24VDC	0-150W	-	+/-3%	≥92.5%	-20-45℃	90℃	402x30x22mm	optional
SLT150-48VFE-EU	AC220-240V	0.95	48VDC	0-150W	-	+/-3%	≥93.5%	-20-45℃	90℃	402x30x22mm	EL optional